


BondyRam®

COUPLING AGENT

Modified Polyethylene

Property	Test Methods	Unit	Bondyram® 5101	Bondyram® 5108	Bondyram® 4108
Base Polymer			HDPE	HDPE	LLDPE
MFI 190°C/2.16 kg	D-1238	Gram/ 10 Min	1.5	6	1.5
Density	D-792	g/cm ³	0.96	0.95	0.919
Melting Point	DSC	°C	130°	130°	122°
Maleic Anhydride	FTIR	%	1.0%	1.0%	1.0%
Applications			Wire & Cables HFFR Compounds	Wood and Natural fillers	Wire & Cables Wood Natural fillers

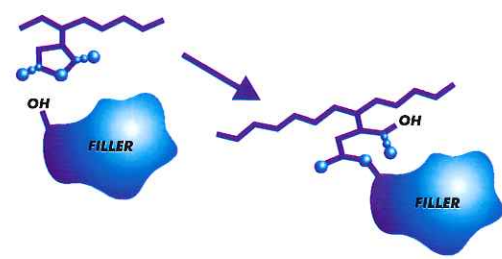

creative thermoplastic compounds

Polyram, Ram-On Industries LP. Ram-On 19205 Israel. Tel: 972-4-6599900
 Fax: 972-4-6499763 www.polyram.co.il E-Mail: mail@polyram.co.il